




HEBEI LEADING METALS AND
PIPING INDUSTRIES CO.,LTD

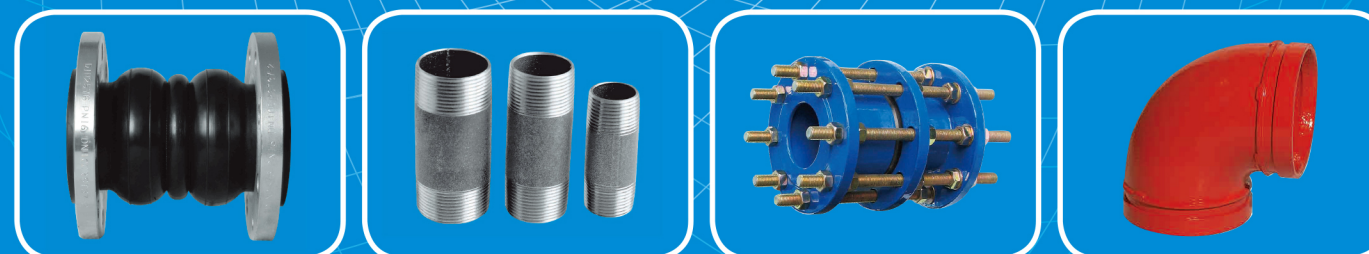

HEBEI LEADING METALS AND PIPING INDUSTRIES CO.,LTD

Add: No.68 Hezuo Road, Shijiazhuang, Hebei, China

Tel: +86 311 89849419 89849420

Fax: +86 311 87706612

E-mail: info@hebeileading.com

Web: www.hebeileading.com

Standard & Size:

- 1) ANSI/ASME B16.5 Size: NPS 1/2" - 24"
- 2) ANSI/ASME B16.47 Series A (MSS SP-44)
Size: NPS 26" - 60"
- 3) ANSI/ASME B16.47 Series B (API 605)
Size: NPS 26" - 60"
- 4) ASME B16.36 Size: NPS 1" - 24"
- 5) DIN Standard
Size: DN10 - DN4000
- 6) BS 4504 Size: DN15 - DN2000
- 7) BS 10 Size: DN10 - DN3000
- 8) JIS B2220 Size : 10A - 1500A
- 9) UNI Standard Size: DN10 - DN2000
- 10) EN 1092-1 Size: DN10 - DN400

Material:

- 1) Carbon Steel:
A105, RST37.2, C22.8, P235GH,
P265GH, S235JR, A37, A42, etc.
- 2) Stainless Steel:
F304/F304L, F316/F316L, F321, F44, F55, etc.
- 3) Other Alloy Steel:
A350 LF2 F52/F60/F65/F70, etc.

Manufacture Process: Forging, Casting

Type:


Slip On, Weld Neck, Plate, Blind,
Socket Weld, Threaded, Lap Joint

Finishing:

Black, Golden, Vanish, Oiled, Galvanized

Facing:

RF, FF, RTJ

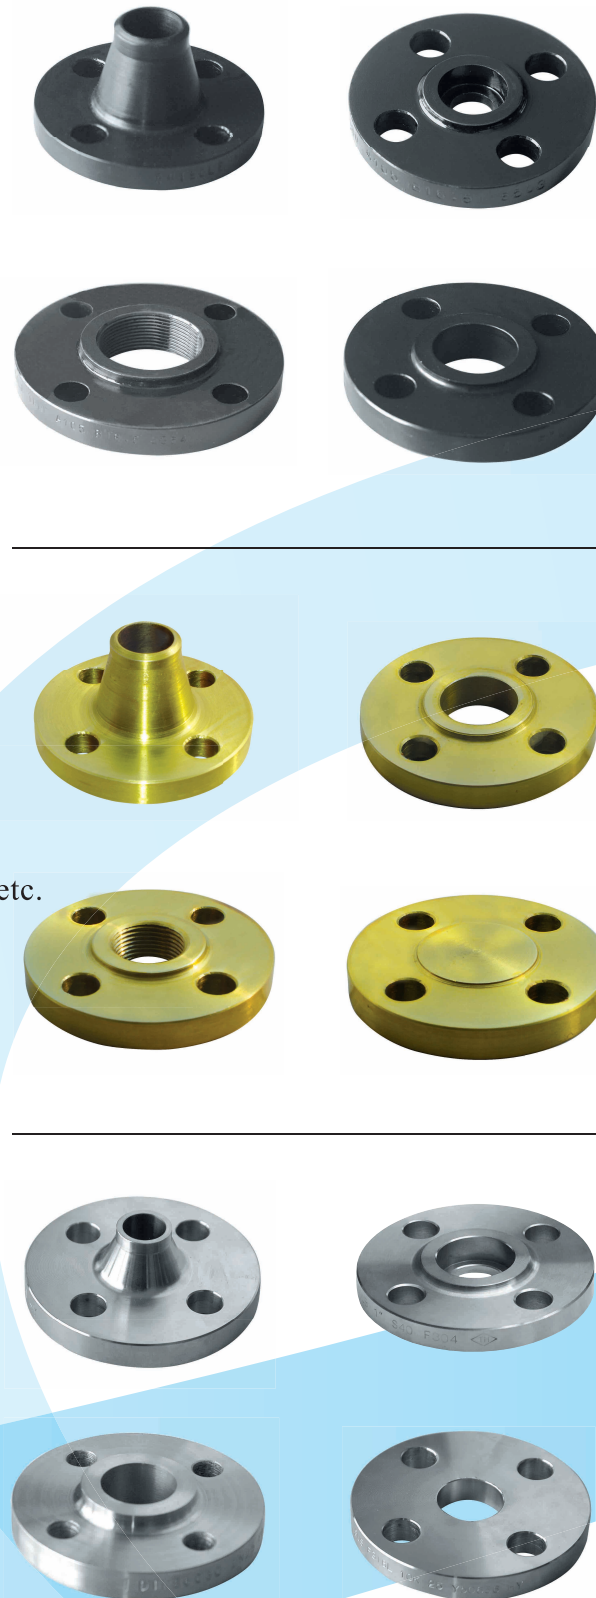

Size : 1/2" - 48" (DN15 - DN1200), or even bigger

Butt Welding Fittings Standard:

ASME B16.9, ASME B16.28
MSS SP-43, MSS SP-75
JIS B2311, DIN 2605/2615/2616/2617
GOST 17375/17376/17378/17379, ISO


Material:

- 1) Carbon Steel
ASTM A234 WPB, JIS G3452,
DIN 1629 ST37, etc.
- 2) Stainless Steel
ASTM A403 WP304/304L, WP316/316L, etc.
- 3) Other Alloy steel

Wall Thickness: SCH10/10S, SCH20/20S, STD, SCH40/40S, XS, SCH80,
XXS etc.(for ANSI), SGP (for JIS)

Finishing:

Carbon Steel: Black, Vanish, Oiled, Galvanized
Stainless Steel: Polished, Pickled

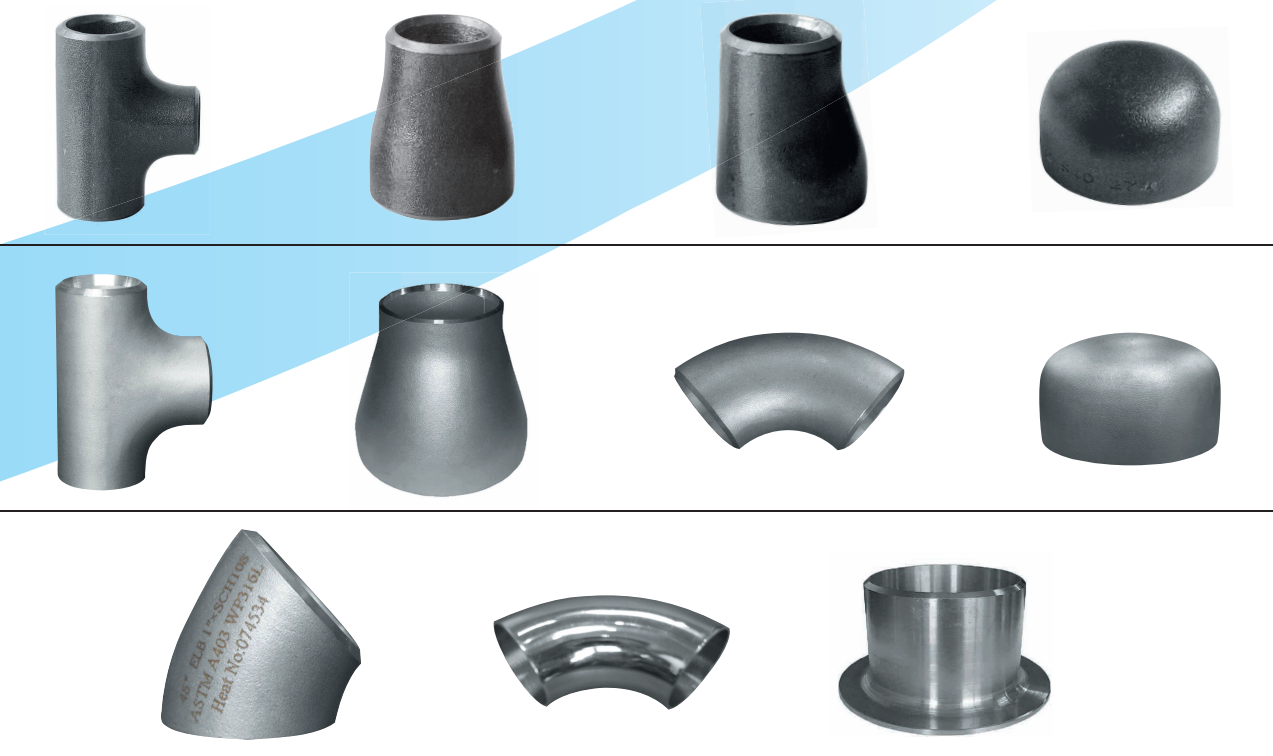


Size: 1/8" - 4" (DN6-DN100)

Standard:
ASME B16.11, MSS SP-79, MSS SP-83, JIS B2316

Material:
ASTM A105, A350 LF2,
ASTM A182 F304/304L, F316/316L, F11/F22 etc.

Rating:
Threaded End: 2000LBS, 3000LBS, 6000LBS
Socket Welding End: 3000LBS, 6000LBS, 9000LBS


Finishing:
Carbon Steel: Black, Galvanized
Stainless Steel: Pickled

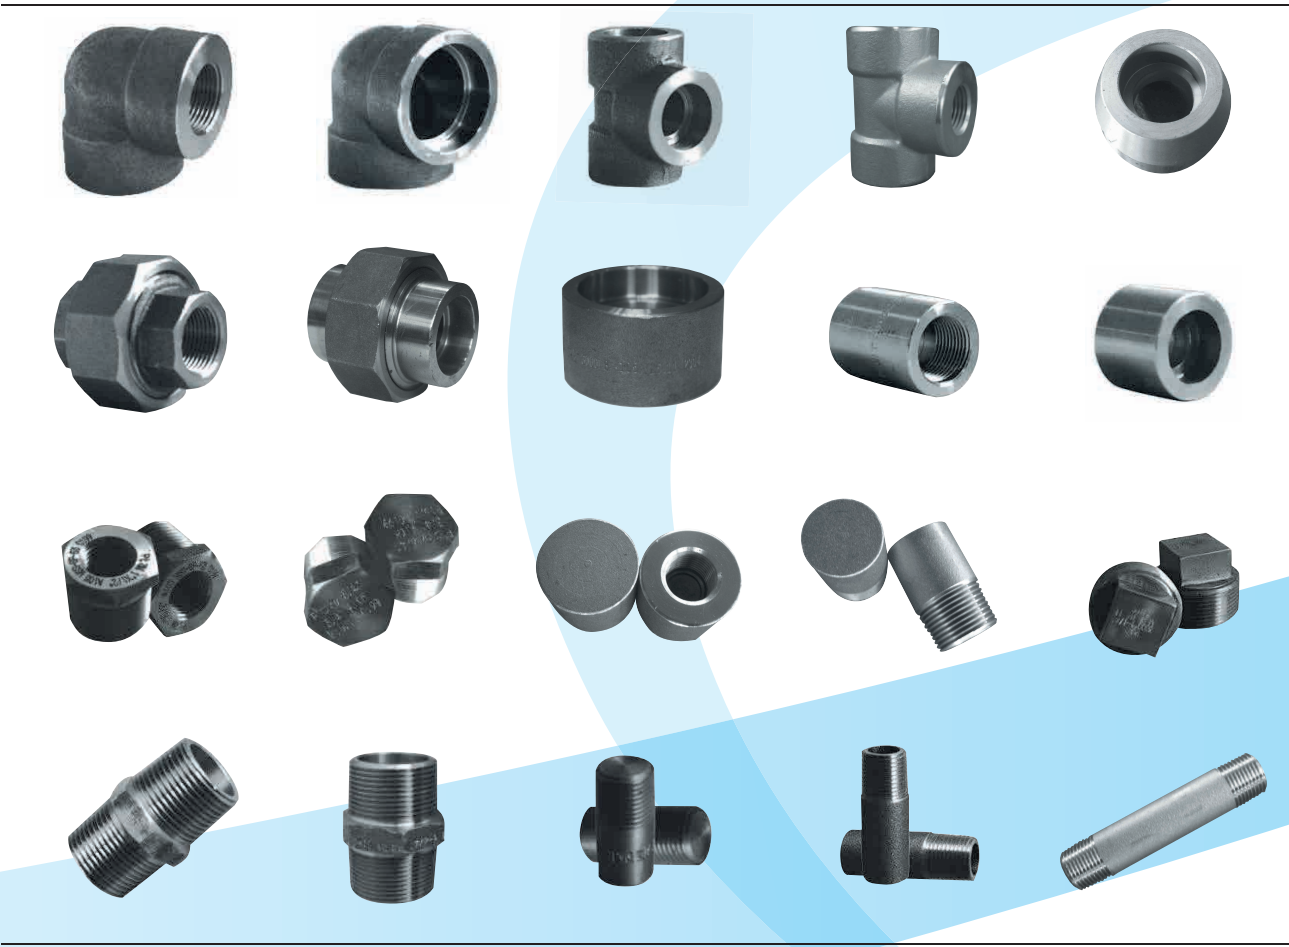

Size : 1/8" - 4"

Thread Standard:
ASME B1.20.1
DIN 2999, BS21
ISO 228/1, ISO 7/1

Material:
ASTM A351 CF8, DIN 1.4308
ASTM A351 CF8M, DIN 1.4408

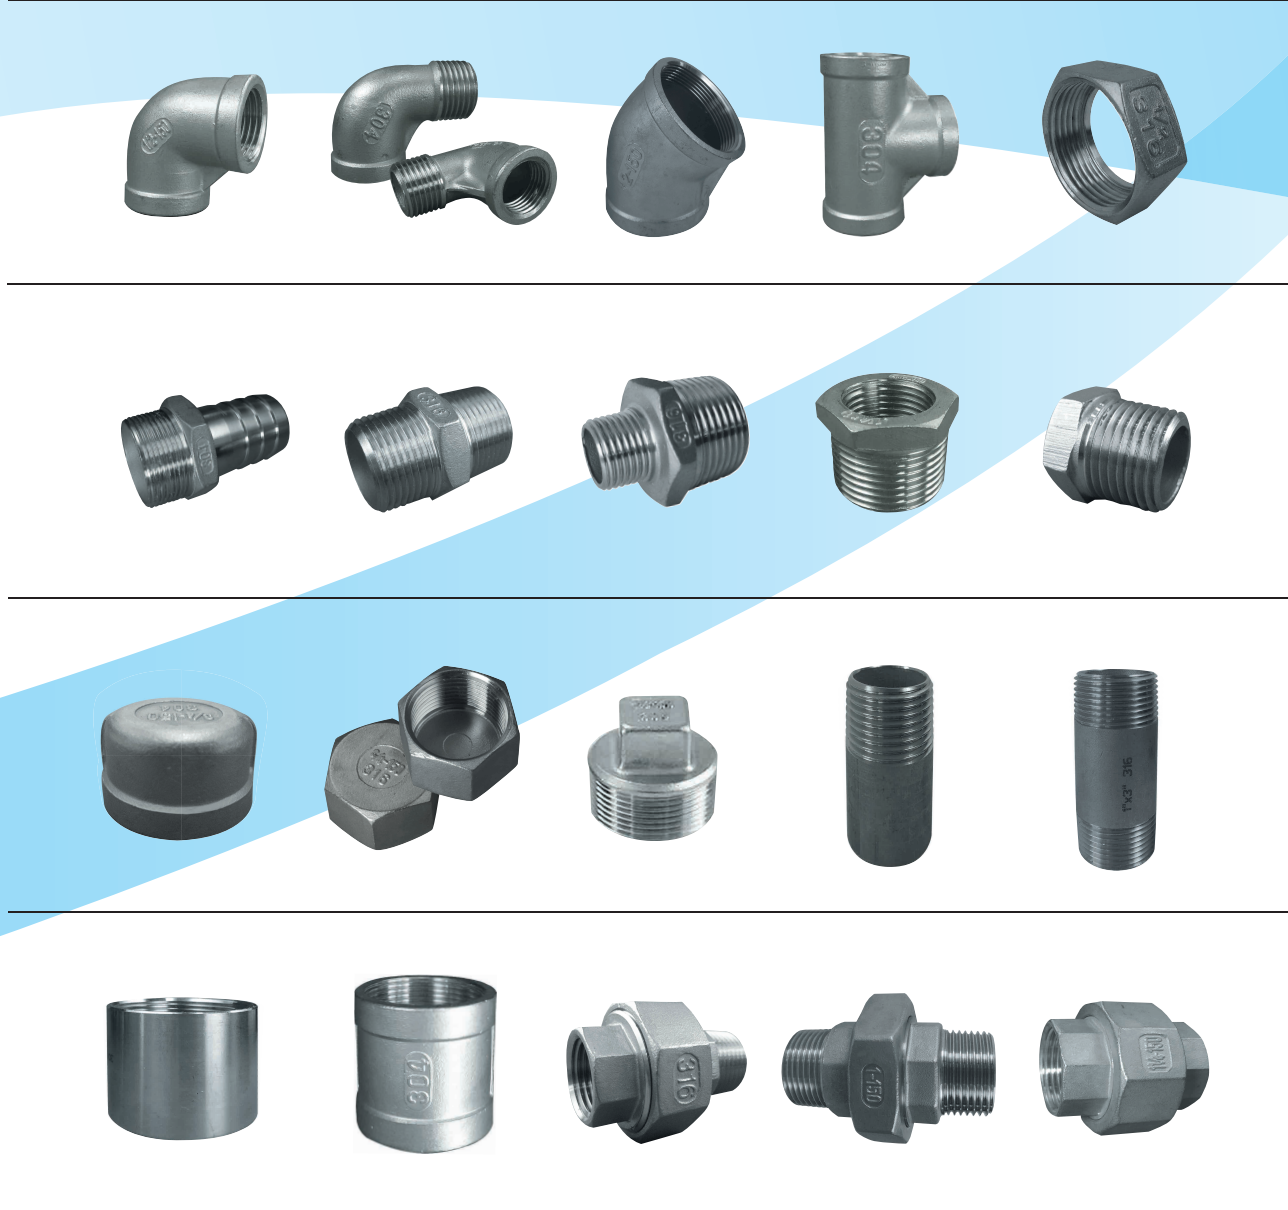

Sockets & Nipples

Size : 1/8" - 6" (DN6 - DN150)

Standard:

ANSI/ASTM A733, DIN 2982, BS 1387, JIS B2302 (For Nipple)
ANSI/ASTM A120, DIN 2986, BS EN 1024:2000 (For Socket)

Material:

Carbon Steel: A53/A106 Gr.B
Stainless Steel : A312 TP304/304L/316/316L

Finishing:Black, Galvanized



Rubber Expansion Joints

Size : 1 1/4" - 120" (DN32 - DN3000)

Type: Single Sphere Flange Type, Double Sphere Flange Type, Union Type

Standard :

- 1) Flange Drilling: DIN PN10/PN16, ANSI 150LBS, JIS 10K/16K
- 2) Union Threading: DIN 2999, NPT, BSP

Working Pressure: Class 150, PN10/16, JIS 10K/16K

Material of Rubber: Neoprene, EPDM, NBR

Material of Flange: Carbon Steel, Stainless Steel



Dismantling Joint

Size: DN50 - DN4000

Material: ASTM A536 Grade 65-45-12, ASTM A36, 304/304L, 316/316L

Flange Drilling: EN 1092, DIN PN10/PN16, Class 125/150, etc.



Ductile Iron Grooved Couplings & Fittings

Size: 1" - 16" (DN25 - DN400)

Material: ASTM A536 Grade 65-45-12

Coating: Painting, Epoxy, Dacromet, Galvanized

Color: Orange, Red

