

YOUR BEST PARTNER IN FLOW CONTROL WORLD



HEBEI LEADING METALS AND PIPING INDUSTRIES CO., LTD
Add: No.68 Hezuo Road, Shijiazhuang City, Hebei Province, China
Tel: +86 311 89849419 / 89849420
E-mail: info@hebeileading.com
Website: www.hebeileading.com



**HEBEI LEADING METALS AND
PIPING INDUSTRIES CO., LTD**

Size:

1 1/2"-48"

End Connection:

Wafer, Lug, Double Flanged, U-Section, Grooved End

Body Material:

Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Disc Material:

Ductile Iron(Nickel Plated or Nylon Coated)
Cast Steel(A216 WCB)
Stainless Steel(CF8, CF8M, CF3, CF3M)
Aluminum Bronze(C954)

Seat Material:

EPDM, Buna-N(NBR), PTFE, Viton, Metal Seated

Stem Material:

SS410, SS416, SS304, SS316

Actuator:

Handle Lever, Worm Gear, Pneumatic Actuator,
Chain Operator

Standard:

API 609, BS 5155, MSS SP-67/68, EN 593

Working Pressure:

Class 125/150, PN10/16/25, 5K/10K/16K



Gate Valves Flanged End

Size: 1½"-48"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Iron Gate Valves

Sealing Material: EPDM, NBR, Brass, Bronze, Stainless Steel

Standard: AWWA C509, AWWA C515, MSS SP-70, DIN 3352, BS 5163,
BS 5150, JIS B2031

Working Pressure: Class 125/150, PN10/16, 5K/10K/16K




Cast Steel(WCB) & Stainless Steel Gate Valves

Sealing Material: 13Cr, 304, 304L, 316, 316L, STL, Monel, Alloy 20

Standard: API 6D, API 600, ASME B16.34, DIN 3352, BS 1414, JIS B2071

Working Pressure: Class 150/300/600/900, PN10/16/25/40/63, 5K/10K/16K

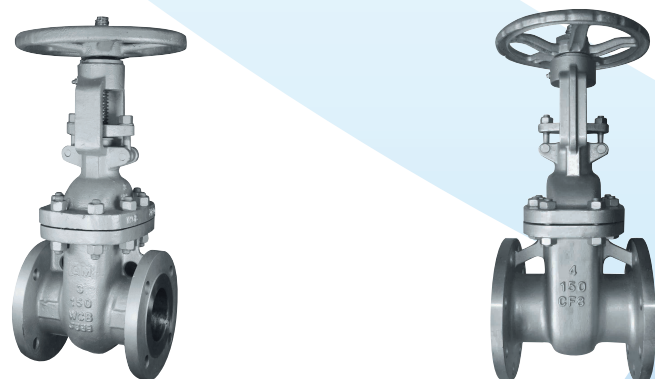

Globe Valves Flanged End

Size: ½"-24"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Iron Globe Valves

Sealing Material: Brass, Bronze, Stainless Steel

Standard: MSS SP-85, DIN 3356, BS 5152, JIS B2031

Working Pressure: Class 125/150, PN10/16, 5K/10K/16K



Cast Steel(WCB) & Stainless Steel Globe Valves

Sealing Material: 13Cr, 304, 304L, 316, 316L, STL, Monel, Alloy 20

Standard: ASME B16.34, DIN 3356, BS 1873, BS 5160, JIS B2071

Working Pressure: Class 150/300/600/900, PN10/16/25/40/63, 5K/10K/16K



Check Valves Flanged End

Size: 1 1/2"-24"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Iron Check Valves

Sealing Material: Brass, Bronze, Stainless Steel, EPDM, NBR

Standard: MSS SP-71, DIN 3202, BS 5153, JIS B2031

Working Pressure: Class 125/150, PN10/16, 5K/10K/16K



Swing Type



Lift Type



Ball Type

Cast Steel(WCB) & Stainless Steel Check Valves

Sealing Material: 13Cr, 304, 304L, 316, 316L, STL, Monel, Alloy 20

Standard: API 6D, ASME B16.34, DIN 3202, BS 1868, JIS B2071

Working Pressure: Class 150/300/600/900, PN10/16/25/40/63, 5K/10K/16K



Check Valves Wafer Double Disc

Size: 1 1/2"-24"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Disc Material: Ductile Iron(Nickel Plated), Stainless Steel(CF8, CF8M, CF3, CF3M),
Aluminum Bronze(C954)

Sealing Material: EPDM, Buna-N(NBR), Neoprene, Metal Seated

Standard: API 594

Working Pressure: Class 125/150, PN10/16, 5K/10K/16K



Y-Strainer Flanged End

Size: 1 1/2"-24"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Screen Material: 304, 316

Standard: ASME, DIN, BS

Working Pressure: Class 125/150/300/600/900, PN6/10/16/25/40/63



Cast Iron



Cast Steel(WCB)



Stainless Steel

Ball Valves Flanged End

Size: 1/2"-48"

Body Material: Gray Iron(GG25), Ductile Iron(GGG40/50), Cast Steel(WCB),
Stainless Steel(CF8, CF8M, CF3, CF3M)

Ball Material: WCB+ENP, 2Cr13, 304, 304L, 316, 316L

Iron Ball Valves


Sealing Material: PTFE, R-PTFE, NYLON, PEEK

Standard: ASME B16.10, MSS SP-72, DIN 3357, BS 5159, JIS B2031

Working Pressure: Class 125/150, PN10/16, 5K/10K/16K



2PC



2PC with Mounting Pad

Cast Steel(WCB) & Stainless Steel Ball Valves


Sealing Material: PTFE, R-PTFE, NYLON, PEEK

Standard: API 6D, API 608, ASME B16.34, DIN 3357, BS 5159, JIS B2071


Working Pressure: Class 150/300/600/900, PN10/16/25/40/63, 5K/10K/16K



1PC Stainless Steel



2PC Stainless Steel



3PC Stainless Steel



2PC WCB

Stainless Steel Valves(Threaded/BW/SW End)



Size: 1/4"-4"

Body Material: CF8, CF8M, CF3M

Sealing Material: PTFE, R-PTFE

Standard: ANSI, BS, DIN

Working Pressure: 200, 800, 1000, 1500, 2000WOG

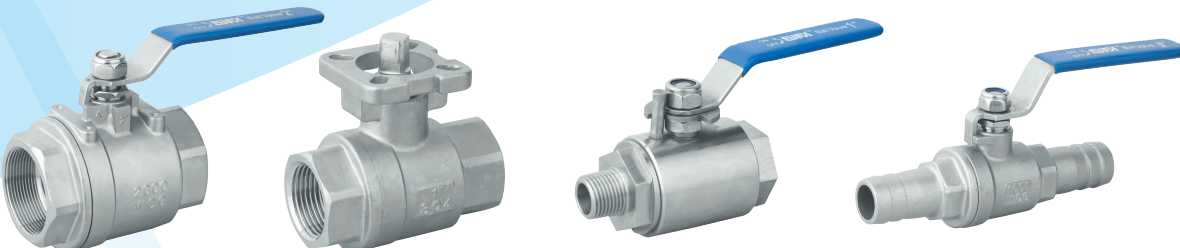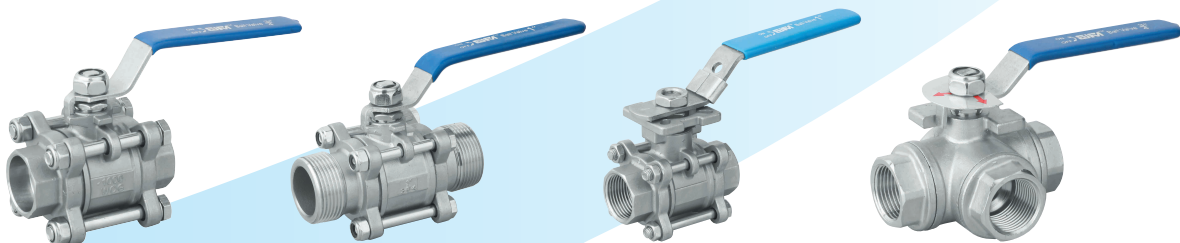

Size: 1/4"-30"

Body Material: A105, LF2, F11, F22, F304, F304L, F316, F316L

Sealing Material: 13Cr, 304, 304L, 316, 316L, STL, Monel, Alloy 20

Standard: API 600, API 602, ASME B16.34, BS 5352






End Connection: 1) Flanged—ASME/ANSI B16.5

2) SW—ANSI B16.11




3) BW—ANSI B16.25

4) Screwed—ANSI B1.20.1, BS 21, ISO 7/1, DIN 2999



Working Pressure: 800, 1500, 2500LBS

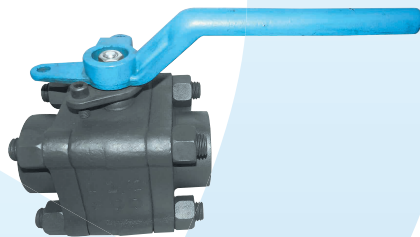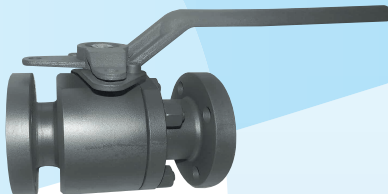

Gray/Ductile Iron Valve Body



Cast Steel Valve Body



Stainless Steel Valve Body

